


PNEUMATIC GRIPPER FEED J341

Strip cross section 380 mm²

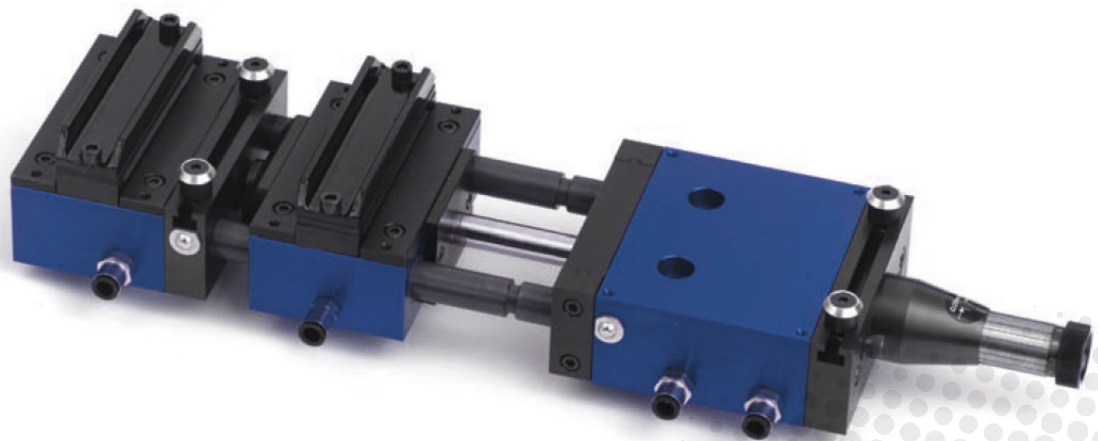

- Clamping force at 6 Bar 1,3 kN
- Traction force at 6 Bar 412 N

SCOPE OF DELIVERY AND OPTIONS


- Feed device complete with cover
- Pneumatic Control with solenoid valve and connecting hoses
- Pilot release
- Mounting bracket
- Clamping elements made of polished steel
- Clamping element cannulated or Nylon
- Clamping element according client specifications.



PNEUMATIC GRIPPER FEED J341



PERFORMANCE

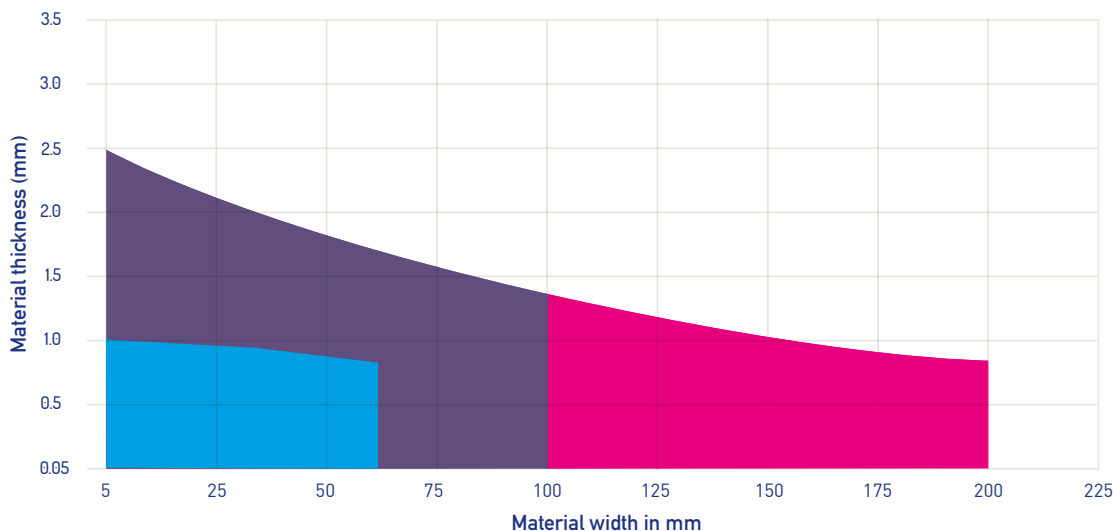

PRODUCTS


J 341.xx1

J 341.xx2

J 380

Performance curve exemplary. Specific calculations on request.

TECHNICAL SPECIFICATIONS

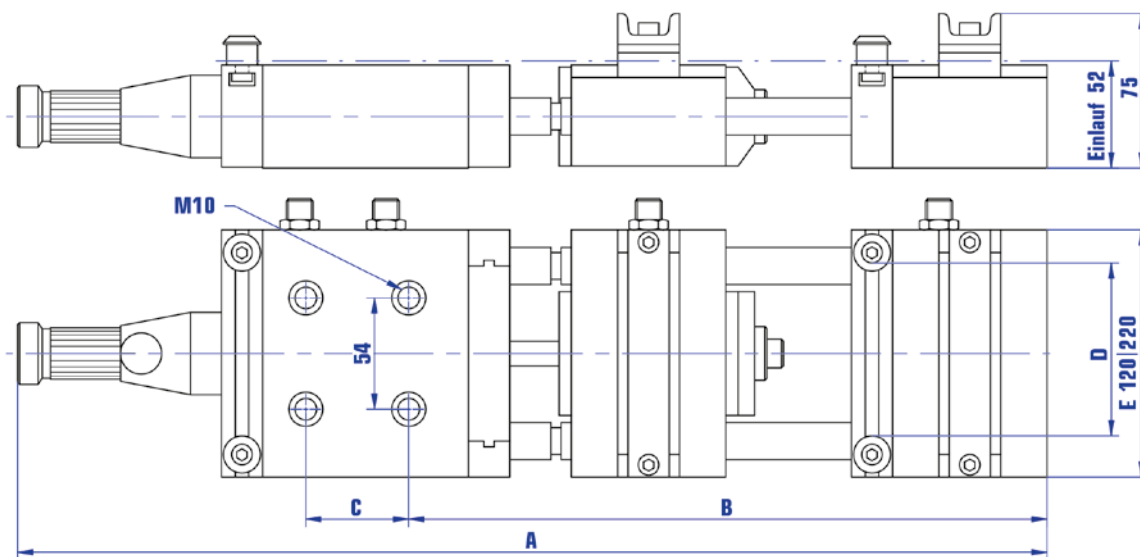

MODEL	J341.061 (J 341.062)	J 341.121 (J341.122)	J 341.201 (J 341.202)
Feed length (mm)	0-60	0-120	0-200
Band width max.(mm) - D	100 (200)	100 (200)	100 (200)
Band thickness (mm)	2.5	2.5	2.5
Distance A (mm)	500	620	780
Distance B (mm)	310	370	450
Distance C (mm)	-	100	100
Max. stroke rate unloaded	180/min.	140/min.	90/min.
Air consumption per cycle	0.9 l	1.4 l	2.0 l
Clamping force (at 6 bar)	1300N		
Traction force (at 6 bar)	412 N		

SWITZERLAND

Zehnder & Sommer AG
CH-3400 Burgdorf
info@zehndersommer.com
Tel +41 31 740 50 50

GERMANY

Zehnder & Sommer GmbH
DE-58452 Witten
info@zehndersommer.de
Tel +49 2302 276140

zehndersommer.com
ZSswiss.com

On request available in the following feed lengths 260 / 350 / 420